Outdoor Housing for Box Cameras (12VDC/24VAC)

BOH-1300

H/ W Version: 1

Easy to mount and install

BOH-1300 is an indoor/outdoor protective housing for LevelOne IP Network Cameras. It is lightweight and easy to install. This is a cost-effective solution for professional surveillance networks. BOH-1300 also supports DC12V or AC24V power for flexible deployment.

Built-in Heater and Fan

It also features a built-in heater and fan that controls the temperature of the enclosed camera. The fan operates between 25°C and 35° C, while the heater operates between 15°C and 25°C.

1. Heater
2. Mounting bracket
3. Power relay board
4. Fan

Key Features

- Designed for Indoor/outdoor applications
- IP66-rated waterproof housing for box cameras
- Lightweight for easy wall mounting
- Includes fan and heater to withstand severe weather conditions
- Works with either DC12V or AC24V power source
- Easy access for service and installation

Works Well With

FCS-1081A
PoE IP Network Camera

FCS-1101
PoE IP Network Camera

Technical Specification

Material
Aluminum extrusion

Regulation Rated
IP66

Housing Color
Beige

Input Power Voltage
DC12V/1.5A or AC24V/1.5A

Dimension
313(L) x 147(W) x 115(H) mm

Window Size
75mm x 75mm

Weight w/o Bracket
950g

Weight w/ Bracket
1233g

Max. Load of Bracket
10kg

Temperature
Operating: -20°C ~50°C

Humidity
0%~95% (RH)

Heater Operating
Activates at 15°C (±5°C)
Deactivates at 25°C (±5°C)

Fan Operating
Activates at 35°C (±5°C)
Deactivates at 25°C (±5°C)

Dimension Diagram

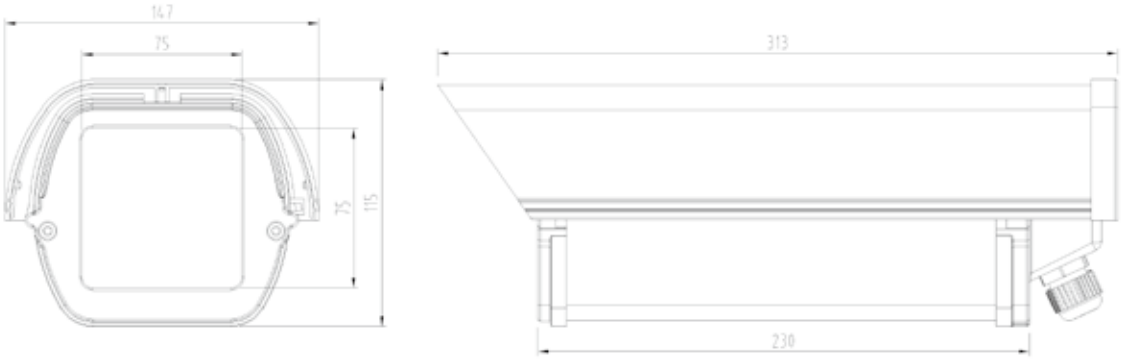

Order Information **BOH-1300:** Outdoor Housing for Box Cameras (12VDC/24VAC)

Package Content
BOH-1300
Camera Bracket
Screw Kit
Quick Installation Guide

All mentioned brand names are registered trademarks and property of their owners. Technical specifications are subject to change without notice.

© Copyright 2008 Digital Data Communications GmbH. All Rights Reserved.